



CA-NP356M4KCI-LTF-LW28PW-M 5MP Smart Dual Light Turret Network Camera



Full Color



Save Storage



AI Functions



Smart Dual Light



Wide Dynamic Range



Mic



Prime Series

- High Quality Imaging 5MP(2880x1620)@30fps
- Fixed Lens 2.8mm
- Excellent Low-Light Performance
- Color 0.002 Lux @(F1.0, AGC ON); B/W 0 lux @ IR ON
- Smart Dual Light technology captures full-color video
When motion is detected.
- IR Viewable Distance: 25m
- Efficient Compression Technology H.265/H.265+/H.264/H.264+/MJPEG
- AI Smart Features: Face Detection, Human & Vehicle Detection, Line Crossing,
Object Detection, Crossing Counting, Heat Map, Crowd Density, Queue Length, License
Plate, Rare Sound, Intrusion, Region Entrance, Region Exiting.
- Wide Dynamic Range WDR, 3D DNR, HLC, BLC
- Built-in Microphone
- Water and Dust Resistant (IP67)






I Specifications

Model Name	CA-NP356M4KCI-LTF-LW28PW-M
Camera	
Imaging Device	1/2.7"
Effective Pixels	5MP 2880(H)x1620(V)
Scanning System	Progressive CMOS
Min. Illumination	Color 0.002lux @ F1.0(AGC ON); B/W 0 lux @ IR ON
Lens	
Focal Length (Zoom Ratio)	2.8mm
Max. Aperture Ratio	F1.0
Angular Field of View	Horizontal: 110°, Vertical:58°, Diagonal: 132°
Min. Object Distance	2m
Lens Type	Fixed(M12)
Operational	
IR LED	1pc
WarmLight	2pcs
IR Viewable Length	Up to 25m
WarmLight Viewable Length	Up to 20m
Type of complementary light	Default warm light, Switchable infrared light
Motion Detection	Off/On (8 Level)
Wide Dynamic Range	WDR
Image Enhancement	BLC, 3D DNR, HLC
Day & Night	Full Color Mode /Day&Night Mode/ Smart Illumination
Image Setting	Rotation Mode, Saturation, Brightness, Contrast, Sharpness, White Balance
Electronic Shutter Speed	1/5 ~ 1/20000s
On-Board Storage	Micro SD slot, up to 256GB
Alarm I/O	NA
Audio	Built-in Microphone
P2P	Yes
Hardware Reset	Yes
Smart Features	Face Detection, Pedestrian & Vehicle Detection, Line Crossing, Object Detection, Crossing Counting, Heat Map, Crowd Density, Queue Length, License Plate,Rare Sound, Intrusion, Region Entrance, Region Exiting



Network	
Ethernet	RJ45(10/100BASE-T)
Video Compression Format	H.265/H.265+/H.264/H.264+/MJPEG
Resolution	5MP(2880x1620)@30fps
Video Quality Adjustment	256Kbps ~ 8Mbps
Bitrate control method	CBR/VBR
Protocol	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP/RTSP, SMTP, NTP, UPnP, SNMP, HTTPS, FTP
Interface Protocol	ONVIF(Profile S/G/T/M)
General	
Operating Temperature	-35°C ~ +60°C (-31°F ~ 140 °F)
Operating Humidity	≤ 90% RH
Ingress Protection	IP67
Power	DC12V: max.5.8W, PoE: max.7.1W
Housing	Metal

Dimensions

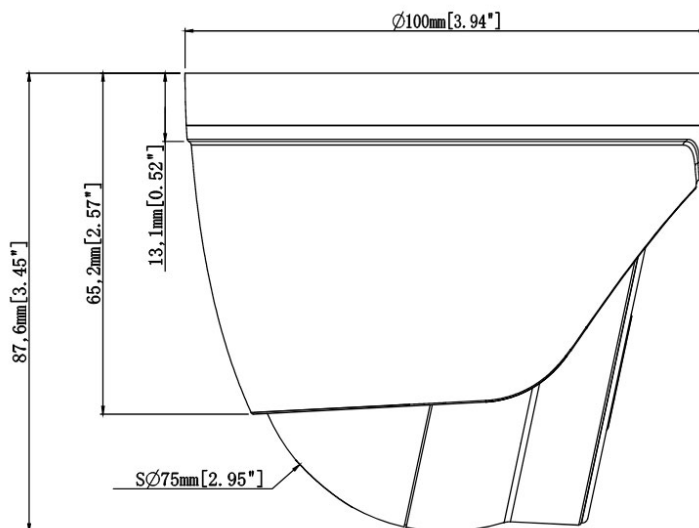

CANADAI Co.,Ltd.
Smart Surveillance Systems
Email us: Support@Canada.net



*All pictures and specifications are for reference only
And are subject to change without prior notice.